Crack-free Ductile Concrete for Resilient and Sustainable Infrastructure

Advanced Construction Material for 21st Century Infrastructure

Dhanendra Kumar (dkumar1@buffalo.edu) & Alok Deshpande (alokabha@buffalo.edu)
Prof. Ravi Ranade, PhD, PE (ranade@buffalo.edu)

University at Buffalo
Institute of Bridge Engineering
https://www.buffalo.edu/ibe.html

Motivation

Conventional Concrete lacks:

I90 Truck Crash (2005)

→ *Resilience*

Spalling Due to Corroded Rebar

→ *Durability*

0.9 ton CO_2/ton of cement

→ *Sustainability*

Objective

To develop **crack free ductile concrete** for Resilient, Durable and Sustainable Infrastructure.

Brittle Concrete

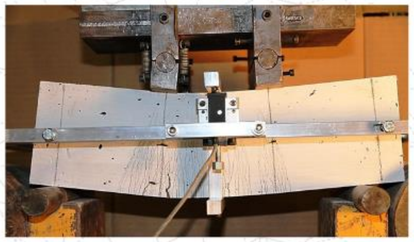

Ductile Concrete (ECC)

Relevance to Transportation Infrastructure

- Vast network of roads and bridges transport 75% of goods nationwide accounting for over 30% of US GDP [Lepech et al 2005]
- FHWA estimates 200,000 bridges structurally deficient; estimating $20.5 Billion annually for next 16 years to update existing bridges [NACE: Highways and Bridges]
- One highway fire is reported every 182 second [NFPA 2012], causing $1.2 Billion direct property loss [NFPA 2016]
- Nearly 43 Megatons of cement used in USA for construction, repair and rehabilitation of concrete pavements annually [Lepech et al 2005]

Emerging ECC Infrastructure

Bridge Pier

Expansion Joint

Tunnel

Precast Bridge Deck Connections

Pavement Overlays

Materials Research @ UB

- We are developing macro crack-free ductile fiber-reinforced concretes known as: Engineered Cementitious Composite (ECC).
- Under tension, these concretes exhibit tensile-strain hardening similar to steel forming only tiny micro-cracks (< 60 μm).

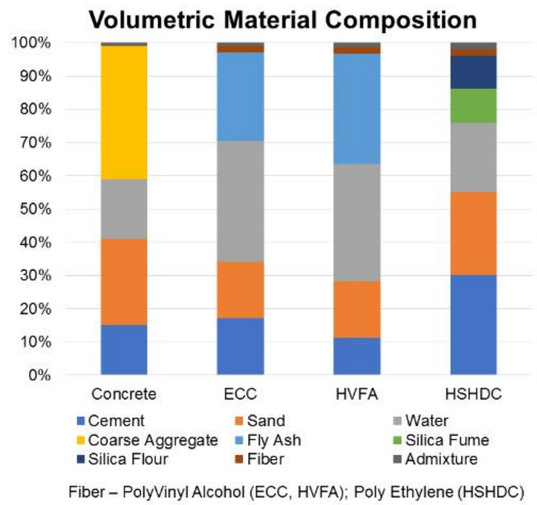

Fiber – PolyVinyl Alcohol (ECC, HVFA); Poly Ethylene (HSHDC)

ECC – Engineering Cementitious Composite
HVFA – High Volume Fly Ash ECC
HSHDC – High Strength High Ductility Composite

Research Approach

Micromechanics based design focused on optimizing the **fiber/concrete interaction**

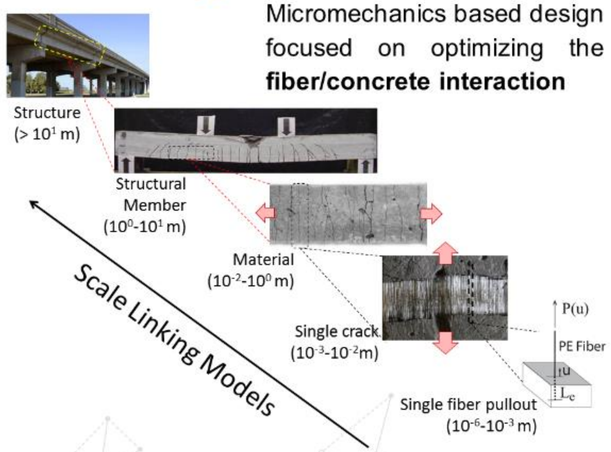

Performance of Materials

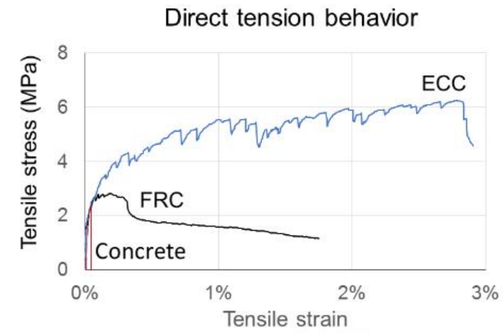

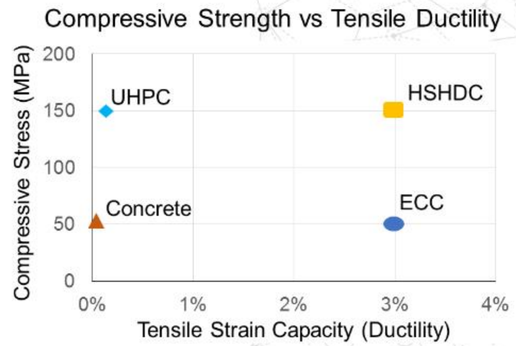

Summary

- ECC exhibits tensile strain capacity of about 3-5% while carrying increasing stress (strain-hardening) beyond the elastic limit
- Fibers in ECC tightly control the crack openings keeping them under 60 μm
- Extremely fine cracks limit penetration of deleterious agents in post-elastic stage making ECC damage tolerant and extremely durable
- Life Cycle Analysis (LCA) of ECC infrastructure shows lower Global Warming Potential (GWP) and Life Cycle Costs compared to conventional concrete

Paving the way for Future Infrastructure

- Self Healing ECC: Reducing repair work
- Self Sensing ECC: A step towards Smart Structures